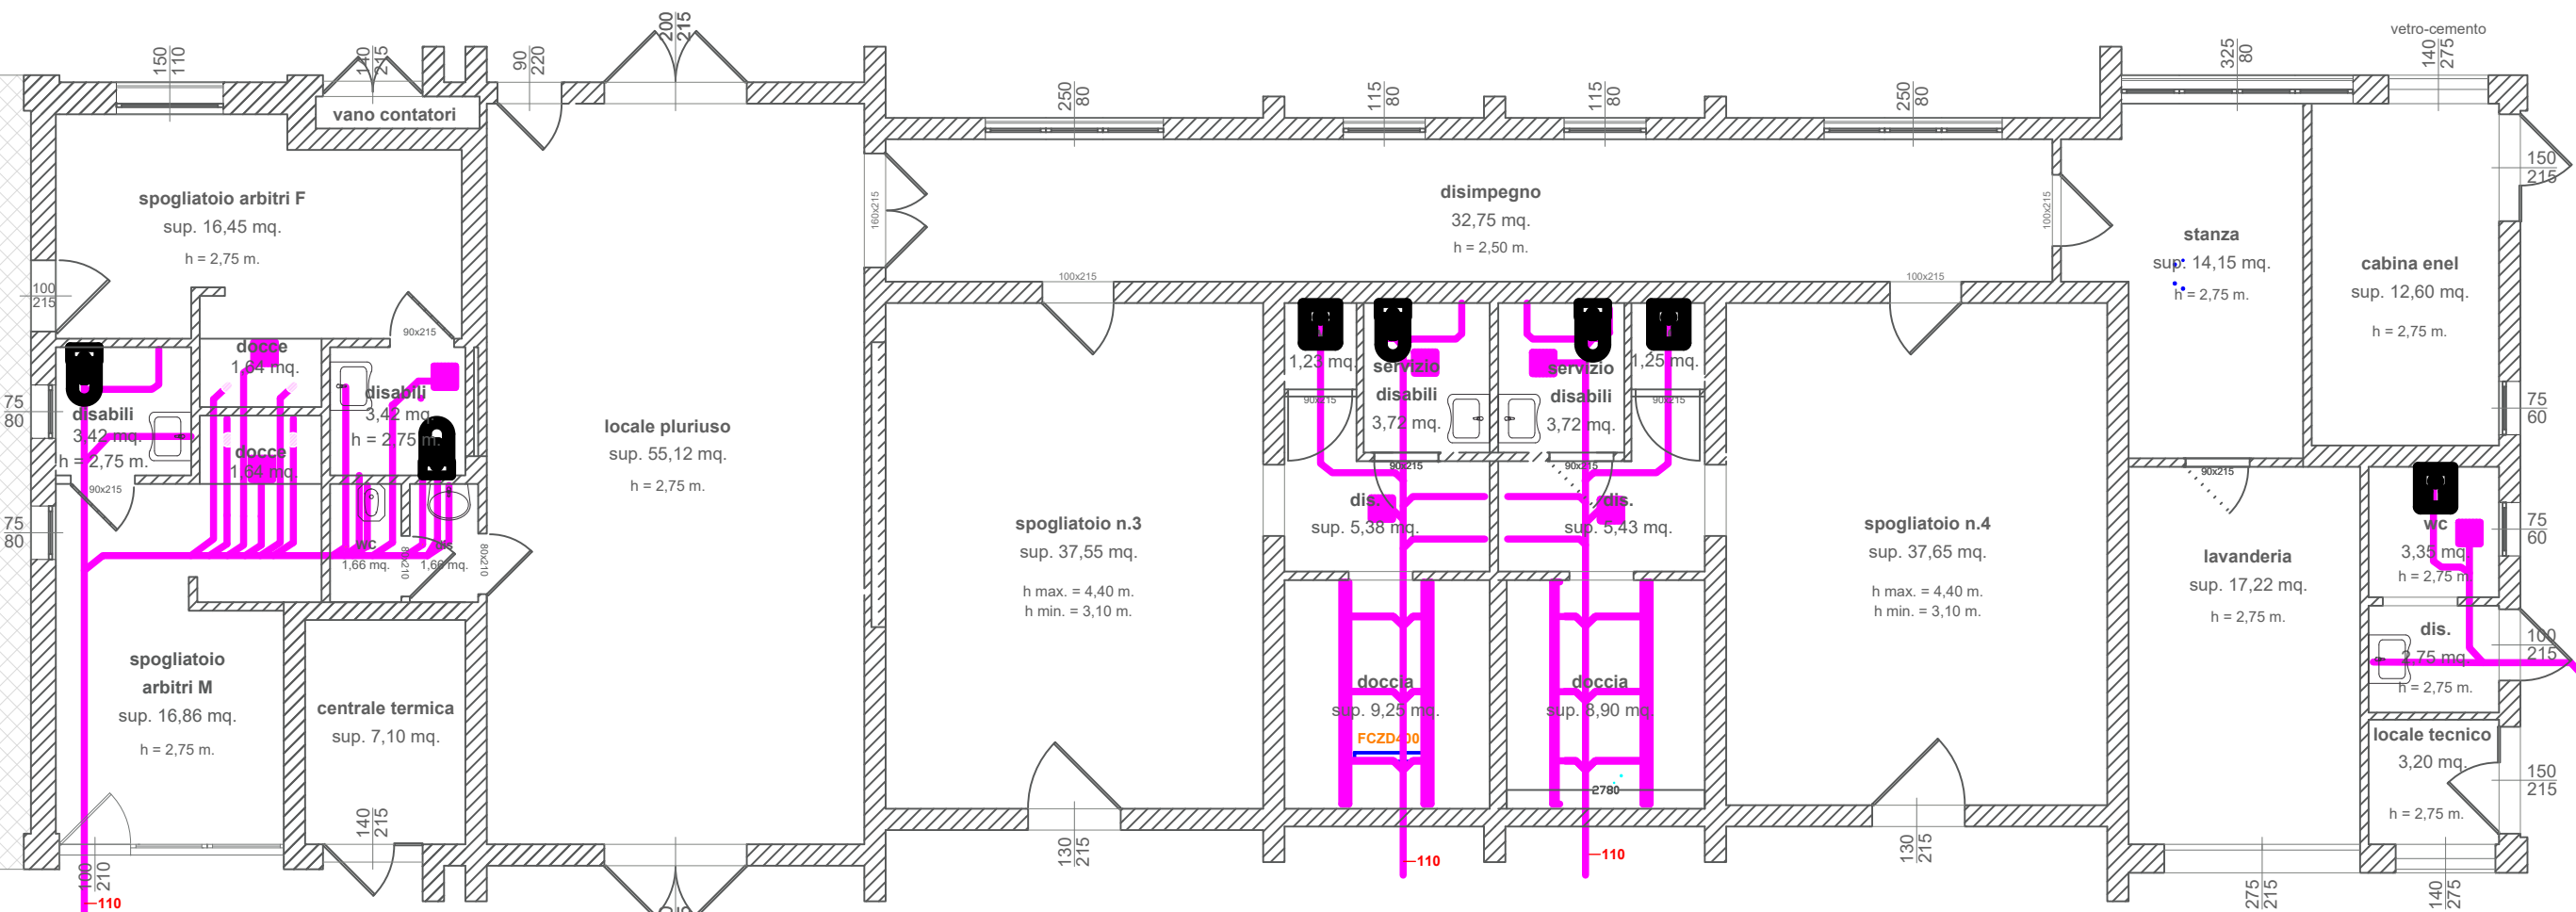
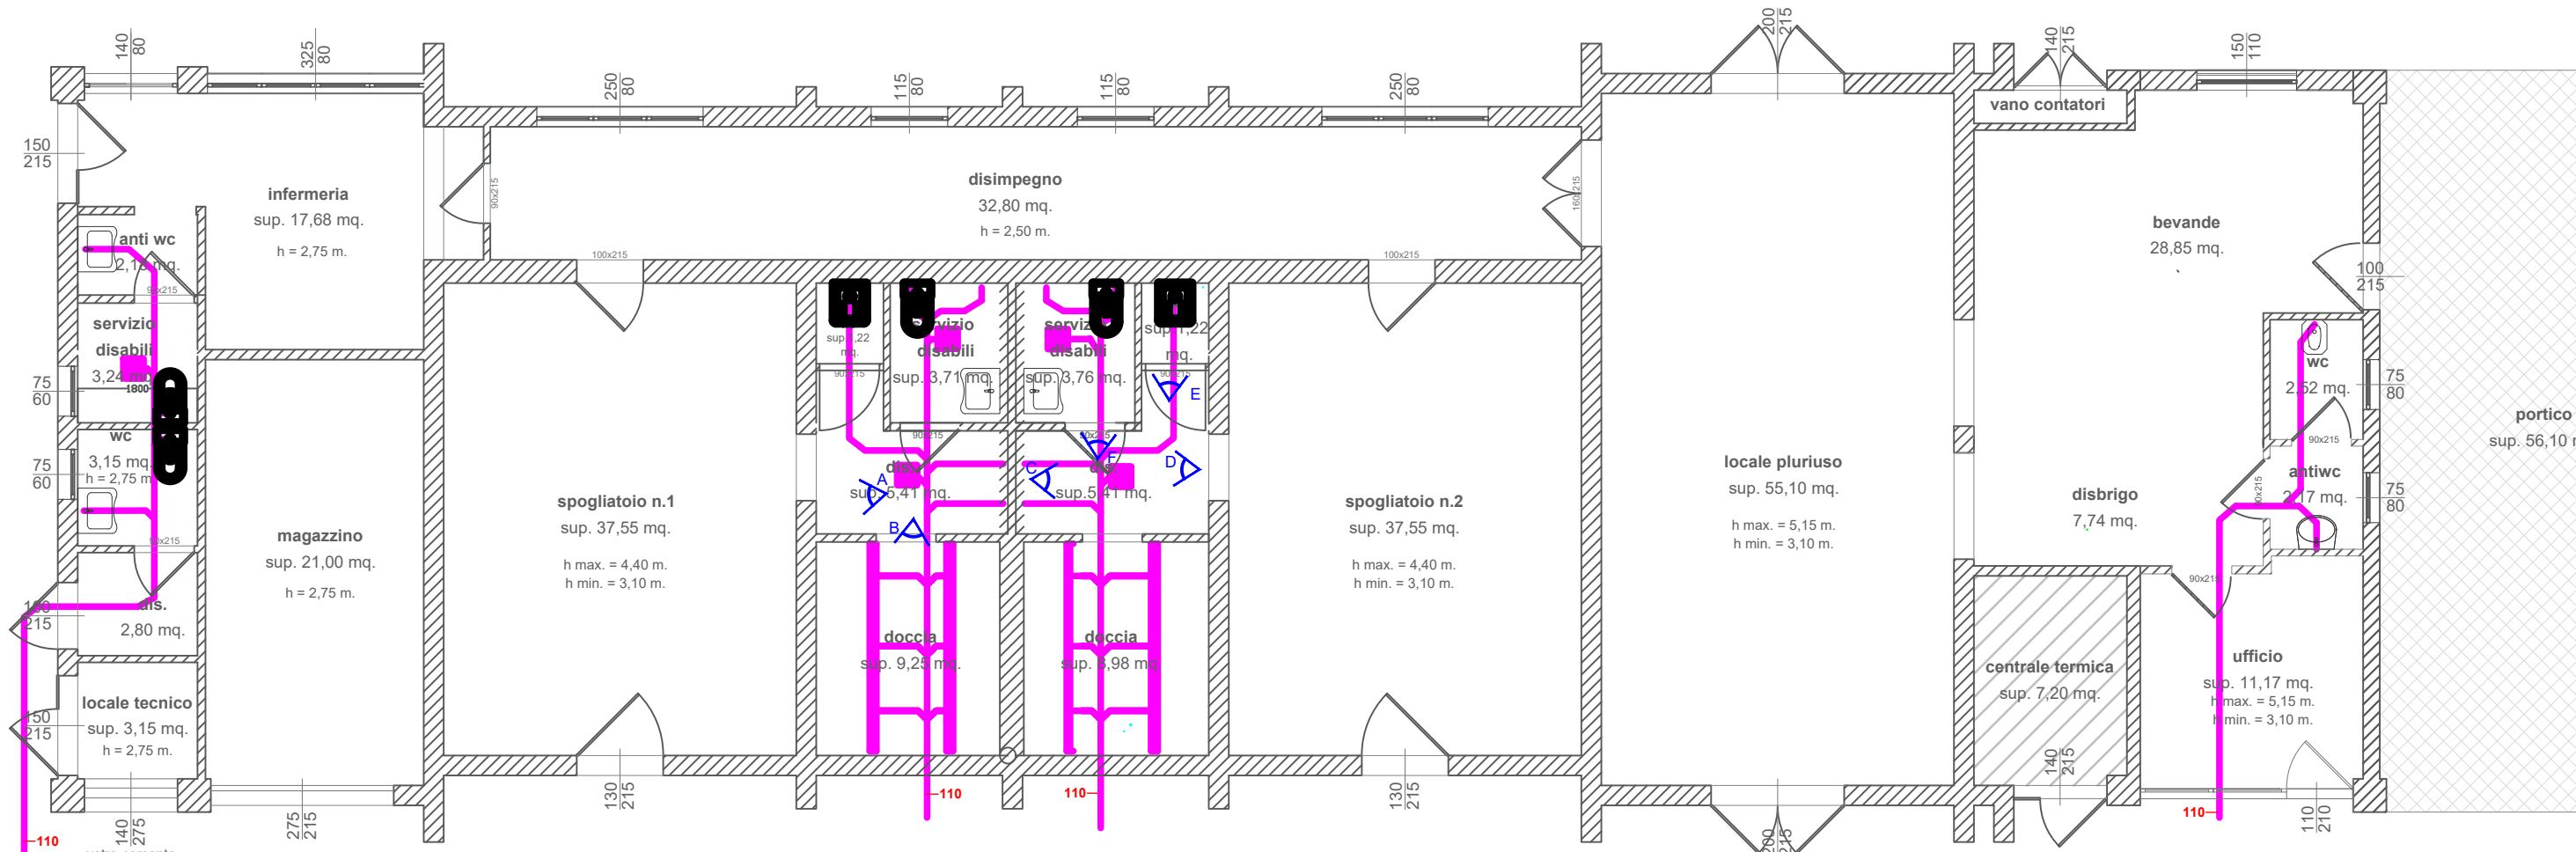


Architectural floor plan of the first floor of a building, showing various rooms and their dimensions. The plan includes a central corridor (disimpegno) and several rooms: infermeria (nursing room), magazzino (warehouse), locale tecnico (technical room), locale plurisuo (multi-story room), disimpegno (corridor), vano contatori (meter room), bevande (drinks), and ufficio (office). The plan also shows a detailed view of the central corridor area, including a staircase (scala) and a bathroom (doccia). The plan is labeled with dimensions and room names in Italian. A red line indicates the location of the new staircase and the new bathroom. The plan is also labeled with "REALIZZARE il collegamento sottotraccia alle nuove dorsali dell'impianto idraulico" (REALIZE the connection of the under-trace to the new main lines of the hydraulic system).


[illegible]

A close-up photograph of a concrete pillar in a room. The pillar is heavily damaged, with large sections of the outer concrete layer missing, revealing a rough, grey interior. Several thick, bundled cables, colored blue and red, are visible emerging from the top of the pillar. The cables are bundled together and run horizontally across the top of the pillar. The surrounding wall is also made of concrete and shows signs of wear and discoloration. A metal pipe or conduit is visible on the wall to the left of the pillar.

\* Tratto d'allacciamento alla colonna.

A photograph of a small, narrow, and dilapidated room, likely a bathroom. The walls are covered in peeling paint and exposed brickwork. A white toilet is visible in the background, partially covered by a white cloth. A blue pipe runs vertically along the right wall. The floor is made of concrete and appears dirty. The room is poorly lit, with light coming from a small opening at the top of the door.

- Zona sinistra:
  - la centrale termica di produzione e le dorsali di distribuzione sono già presenti.
  - i vecchi fan-coils sono stati smantellati e dovranno essere installati quelli nuovi. Dovrà essere realizzata anche la linea tra dorsale termica e singoli fan-coils.
  - i radiatori di alcuni servizi sono stati smantellati; dovranno essere reinstallati con le rispettive dorsali alla rete esistente.
  - gli estrattori delle docce sono stati smantellati e dovranno essere installati quelli nuovi completi di canalizzazioni e bocchette.
  - le dorsali dell'impianto idrosanitario dovranno essere realizzate e dovranno essere collegate alle linee che portano ai collettori di zona; se queste ultime nella parte terminale a soffitto sono a vista dovranno essere portate sottotraccia.
  - i sanitari sono stati smantellati e dovranno essere installati quelli nuovi.
- Zona destra:
  - la centrale termica di produzione e le dorsali di distribuzione sono già presenti.
  - i vecchi fan-coils devono essere smantellati e dovranno essere installati quelli nuovi. Dovrà essere realizzata anche la linea tra dorsale termica e singoli fan-coils.
  - il radiatore dovrà essere allacciato alla rete di distribuzione con nuove tubazioni.
  - gli estrattori delle docce devono essere smantellati e dovranno essere installati quelli nuovi completi di canalizzazioni e bocchette.
  - l'impianto idrosanitario dovrà essere realizzato.
  - i sanitari devono essere smantellati e dovranno essere installati quelli nuovi.

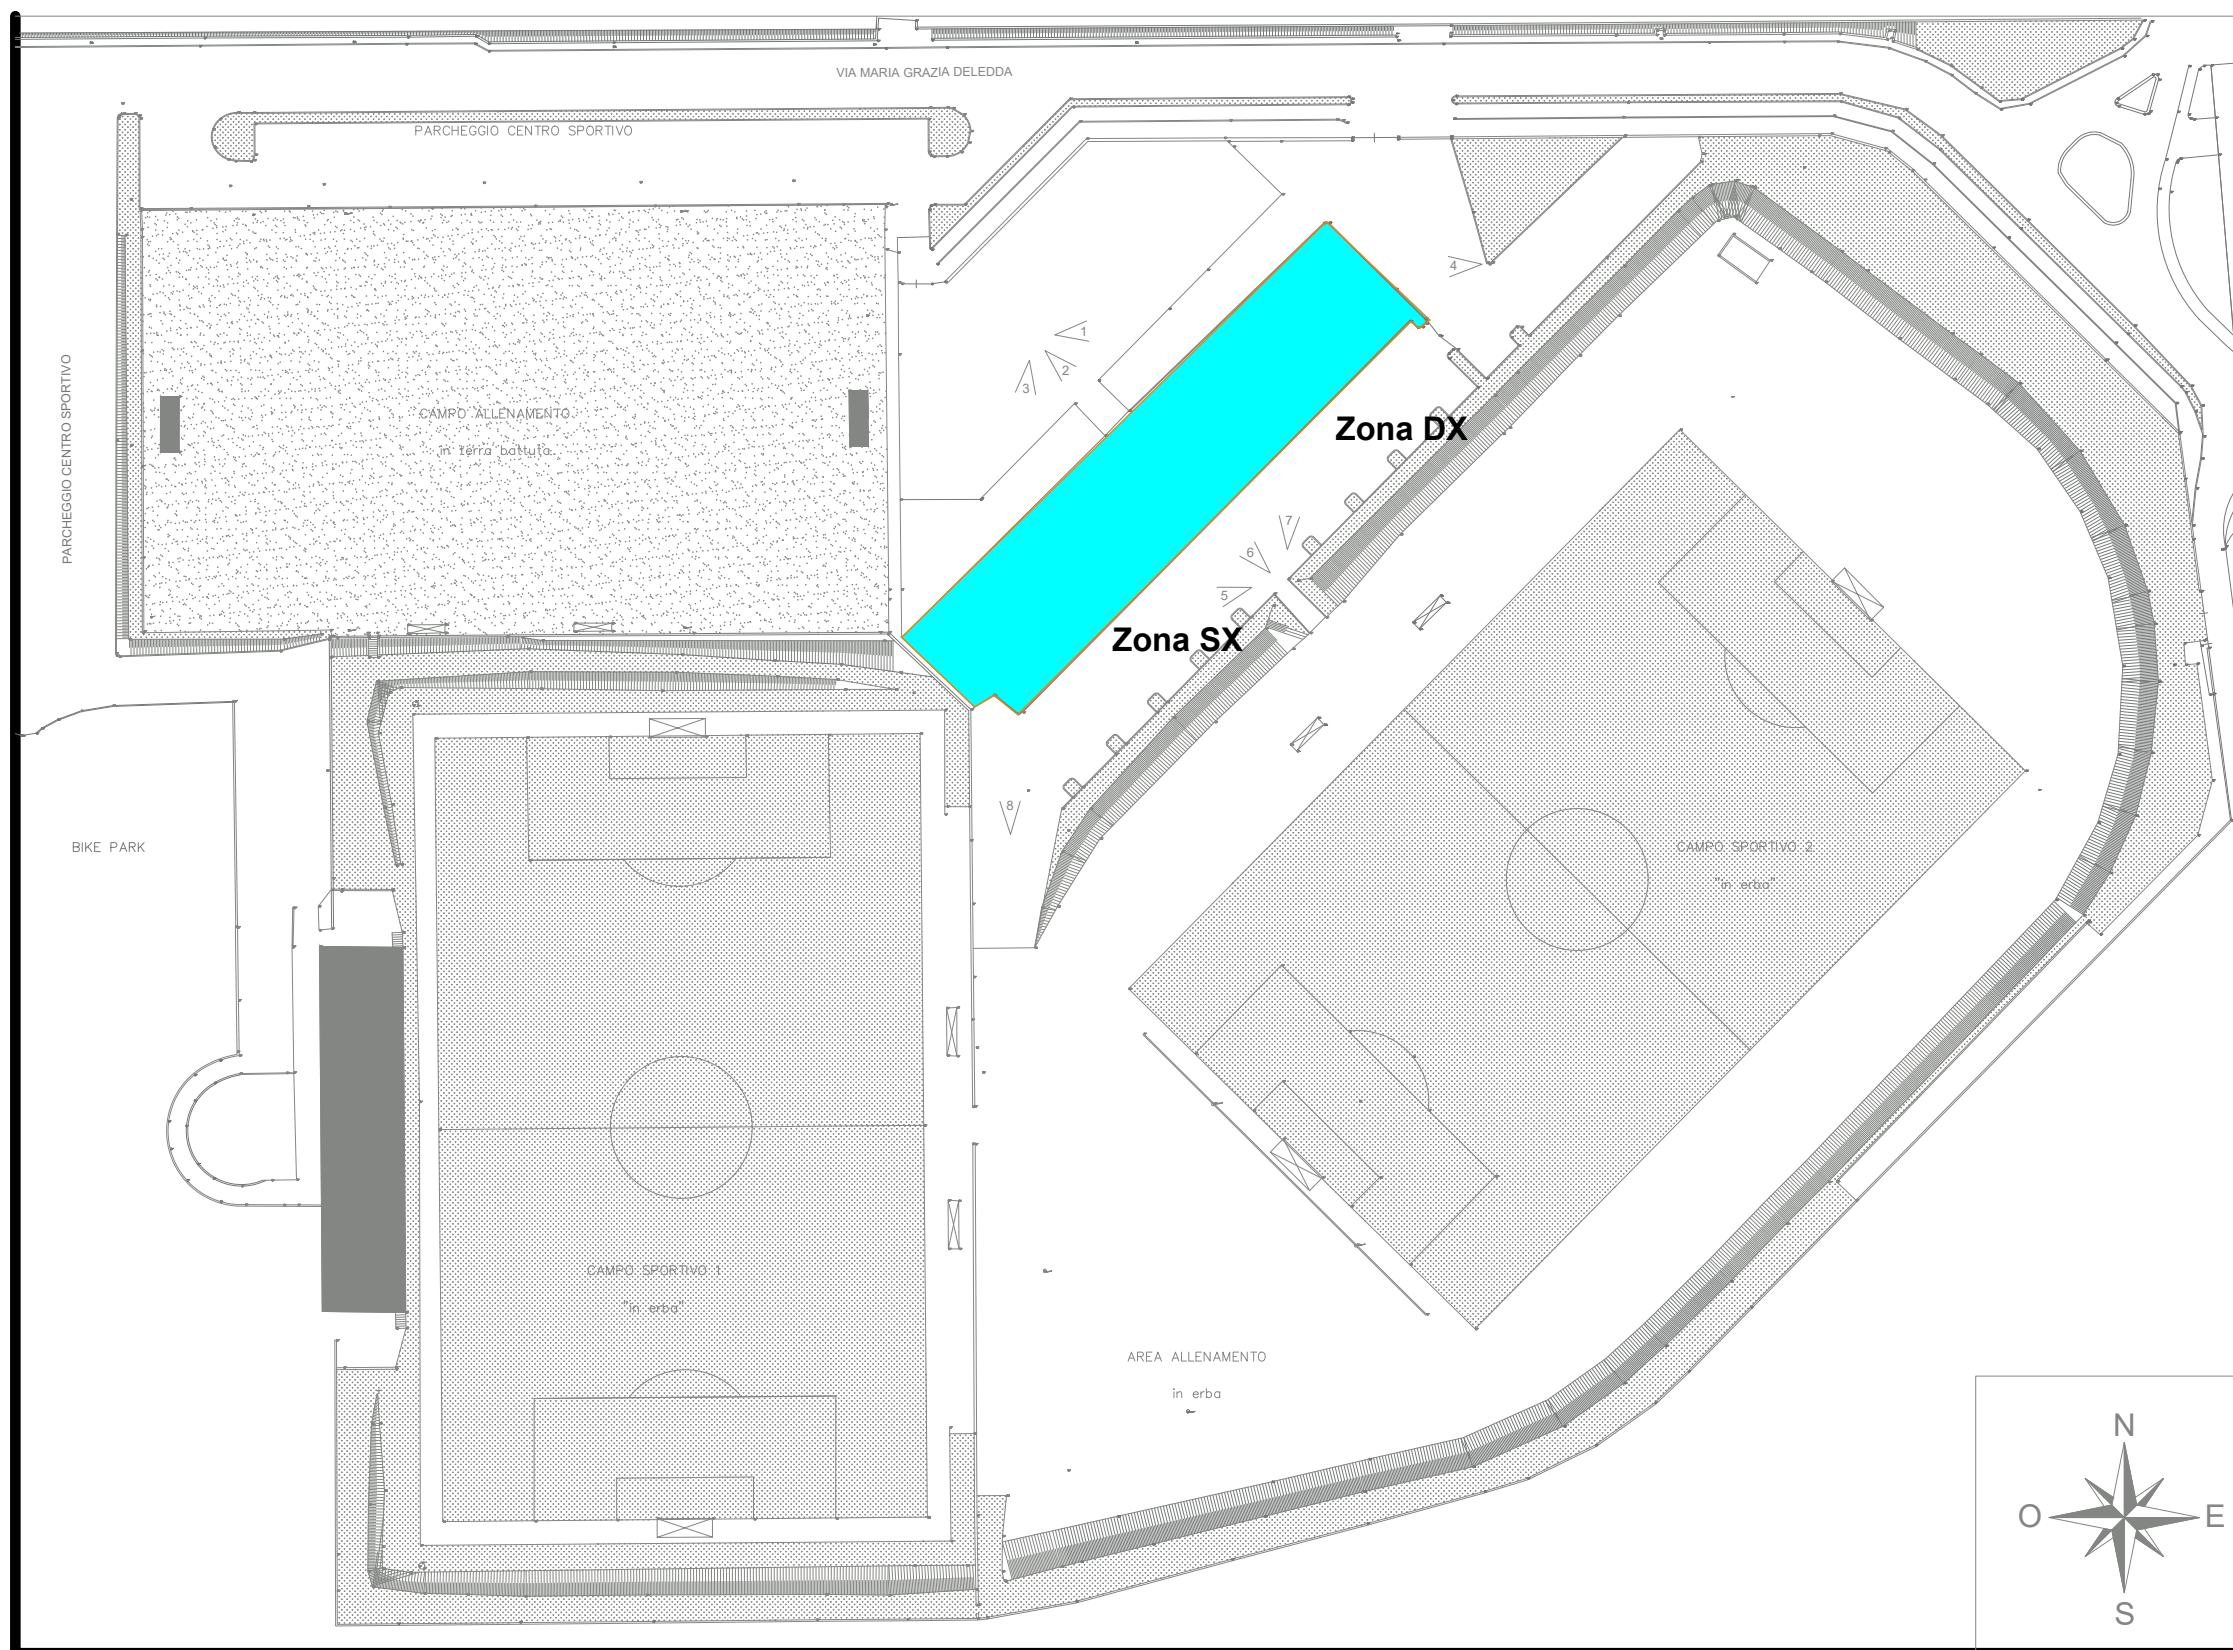

firma		modifica	

[illegible]i  
01